

### PRODUCT DESCRIPTION

LOCTITE® 3D 5015 is a single component light curable silicone specifically designed for prototyping via stereolithography or layer-by-layer additive manufacturing. It is a low viscosity yet high performance silicone that upon exposure to light, cures into a tough silicone elastomer.

The LOCTITE® 3D 5015 provides the following product characteristics:

Technology	Stereolithography 3D Resin
Appearance	Available in Clear, White, Black
Chemical Type	Silicone
Odor	Mild
Cure	Ultraviolet (UV) / Visible Light
Viscosity	Low
Flow Characteristic	Self-leveling, Newtonian fluid
Application	Prototyping
Specific Benefits	<ul style="list-style-type: none"> <li>● Elastomer</li> <li>● Adhesion between layers</li> <li>● Low shrinkage</li> <li>● Short exposure time</li> </ul>

### FEATURES AND BENEFITS

The LOCTITE® 3D 5015 is intended for use in 3D prototyping where the self-leveling characteristic, fast speed of cure and low shrinkage are key properties for the application. Prototypes made of the LOCTITE® 3D 5015 have a -65°C to 105°C continuous operating temperature.

The LOCTITE® 3D 5015 silicone is unique in that it bonds to itself, eliminating any of the layer to layer interface problems during this light cure application.


### TYPICAL PROPERTIES OF UNCURED MATERIAL

#### Typical Value

Specific Gravity @ 25°C	0.99
Flash Point	see MSDS
Viscosity @ 25°C, mPa.s	600
Physica C&P, 50/1 @ 20 1/s or Brookfield C&P, SP52 @ 50 RPM	

The effect of temperature on viscosity for LOCTITE® 3D 5015 is shown in Graph 1.

Graph 1: Viscosity Change over Temperature

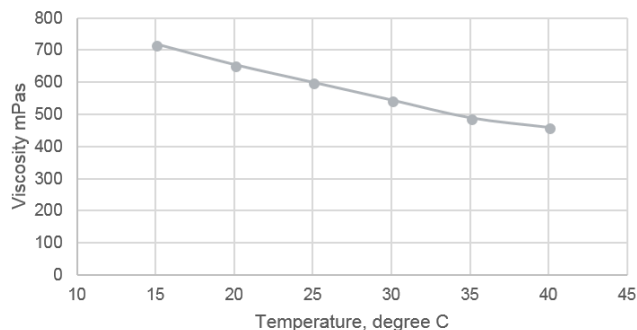

### TYPICAL LIGHT CURING PERFORMANCE

LOCTITE® 3D 5015 can be cured by exposure to ultraviolet (UV) and visible light of sufficient intensity and wavelength. The cure rate and ultimate depth of cure depends upon; light intensity (mW/cm<sup>2</sup>), spectral distribution of the light source, exposure time and percent light transmittance of the printer window through which the light must pass, if applicable. LOCTITE® 3D 5015 will cure with DLP and SLA type 3D printers ranging from 320 to 420 nm.

### TYPICAL LOCTITE® PR10 PRINTER SETTINGS

The following working curve values were determined on the LOCTITE® 3D 5015 for use in the LOCTITE® PR10 printer at 405 nm.

LOCTITE® PR10 Printer (405 nm)			
Working Curve Value	5015 Clear	5015 White	5015 Black
Critical Exposure (Ec), mJ/cm <sup>2</sup>	39.3	22.4	40.6
Penetration Depth (Dp), mm	0.591	0.359	0.286
Penetration Depth (Dp), mil	23.3	14.1	11.3

Contact your local Technical Service Team for recommendations for specific printer settings.

### Surface Cure

When exposed to a full spectrum light source, like the Medium Pressure Hg Arc Lamp @ 100 mW/cm<sup>2</sup> (UVA 320-400 nm) intensity, the LOCTITE® 3D 5015 will typically cure dry to the touch in < 90 seconds. For UV cure after 3D printing, the use of a full spectrum light source or special light cure chamber is suggested in order to effectively cure the surface to a tack free state for handling.

### TYPICAL PROPERTIES OF 3D PRINTED PARTS

Samples prepared using the recommended print settings on the Loctite® PR10 printer provided the following cured material properties.

Typical Value

	5015 Clear	5015 White	5015 Black
Hardness, Shore A, ASTM D2240	69	70	68
Tensile Strength, ASTM D412, N/mm <sup>2</sup>	9.1	9.1	8.9
Modulus @50% Elongation, ASTM D412, N/mm <sup>2</sup>	4.9	5.6	5.1
% Elongation @ break, ASTM D412, %	162	161	163

*After printing, specimens were hand wiped before being tested after 24 hours. Specimens were exposed to additional light from a LOCTITE® CL36 light cure chamber for additional 5 minutes per side at 100 mW/cm<sup>2</sup> (405 nm LED light source).*

*Contact your local Loctite technical customer service team for further information*

### USE AND APPLICATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).**

### Directions for Use

1. This product is light sensitive; exposure to daylight, UV light or artificial lighting should be kept to a minimum during storage and handling.
2. The product should only be used or stored in appropriate light blocking (< 550nm) feed lines, applicators or storage vessels.
3. Shake or stir the LOCTITE® 3D 5015 well before use due to the possibility that the colorants may separate or precipitate over long storage periods.
4. For best 3D printing;
  - a. Mix the 3D resin before each print
  - b. Do not leave resin in printer when not in use
  - c. Filter the resin after each 3D print before reuse
5. The product is designed in the process to be initially cured by UV / visible light in layer by layer type application. Increased exposure intensity or time may be required for curing deeper sections or performance properties.

6. Functional strength between layers is achieved almost instantly upon printing. However, an additional UV cure is suggested after the removal of any residual liquid for both surface cure to remove the tackiness and for safe handling of the 3D prototype part.
7. Excess material can be easily wiped away with non-polar solvents.

### Storage

Store product in cool, dry location, in unopened containers at a temperature between 8°C and 28°C unless otherwise labeled. To prevent contamination of unused product, do not return any material to its original container.

### Laboratory Data Sheet

The data contained herein may be reported as a typical value and/or range. Values are based on preliminary laboratory test data using material produced on a laboratory or small-batch production process. All results are subject to final validation using full scale production batches of material and therefore may change. Further information is available via your local Technical Service Team.

### Note

The developmental product for which the data provided herein are furnished for informational purposes only and are believed to be accurate and reliable. Nevertheless, Henkel Corporation cannot and will not assume responsibility for the results obtained by others over whose production methods we have no control. Thus, it is the user's responsibility to determine the suitability of this developmental product for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling, storage, disposal and use thereof. In light of the foregoing, **HENKEL CORPORATION SPECIFICALLY DISCLAIMS ANY AND ALL WARRANTIES EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND FREE FROM CLAIMS OF THIRD PARTY PATENT INFRINGEMENT, ARISING FROM THE SALE, POSSESSION, HANDLING, STORAGE, DISPOSAL, TRANSPORTATION OR USE OF THIS DEVELOPMENTAL PRODUCT. HENKEL CORPORATION SPECIFICALLY DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND, INCLUDING LOST**



# LOCTITE<sup>®</sup> 3D 5015

## Laboratory Data Sheet

April 2019

---

**PROFITS.** Neither the developmental product, nor the data or discussion herein of various processes for which, are to be interpreted as an express or implied license under any Henkel patents. Henkel Corporation recommends that any and all proposed commercial application(s) using this developmental product be evaluated for reproducibility in the exact manner and on the production equipment with which it is intended to be used before repetitive commercial production use, using this data as a guide. This developmental product may be covered by one or more United States or foreign patents or patent applications of Henkel Corporation, or under which Henkel Corporation is licensed.

